


HINCOL BITUGRIP



Premature failure of flexible pavement is a widespread problem. The important factor contributing to this is improper adhesion between Bitumen and aggregates mostly due to non availability of good quality of aggregates and improper drainage system. HINCOL BITUGRIP is specifically designed solution to tackle such problem by enhancing the adhesion of Bitumen and ensuring stability of Bituminous pavements.

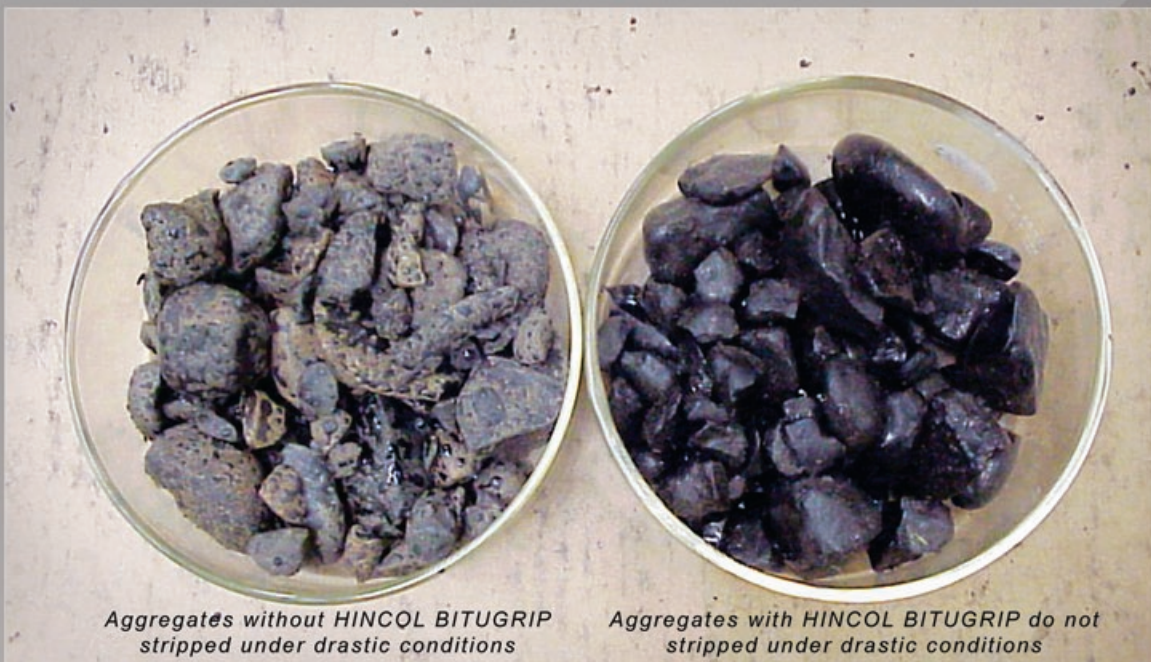

Advantages

- Enhance the service life of the pavement
- Excellent adhesion promoter with all type of aggregates
- Slow down age hardening of Bitumen
- Low dosage required
- Stable at high process temperature of Hot Mix

Application

HINCOL BITUGRIP is very effective while paving roads in high rainfall area and the areas with bad quality of aggregates and improper drainage system. It prevents Bitumen against stripping action of water.

Recommended Rate of Application

0.5-1% by weight of Bitumen to be added in hot mix plant

To Ensure Best Results

- Storage temperature below 40°C
- Use safety gloves and safety glasses while handling
- Do not mix any solvent to it

Availability

Available in Steel drums 180 kg